

NS (IP69K) 系列超高效率三相异步电动机

NS(IP69K) Series Stainless Steel Premium- efficiency Washdown Duty Motors

1/4 THRU 30HP

NEMA 56C THRU 286TC

S1

NEMA Premium

TEFC C-FACE WITH BASE Protection: IP69K

Applications: Food processing, packaging, outdoor and highly corrosive environments.

Features: All external surfaces 300 series stainless steel: motor frame, endplates, conduit box, shaft and base. Four condensate drains in each endplate. Conduit box gasketed. Lip seals. Especially effective in highly corrosive environments where paint or other finishes do not hold up.

Performance Data

TEFC

功率 HP	满载 转速 Full load r/min	机座 Frame	连接 Conn.	代码 Code	460V 电流 Current at 460V			转矩 Torque			效率 Efficiency			功率因数 Power Factor		
					空载 Idle	满载 Full load (A)	堵转 Locked Rotor (A)	满载 Full load (LB-FT)	堵转 Locked Rotor %	最大 Break down %	满载 Full load %	3/4 负 载 3/4 load %	1/2 负 载 1/2 load %	满载 Full load %	3/4 负 载 3/4 load %	1/2 负 载 1/2 load %
1/4	3405	56C	2Y/Y	H	0.22	0.42	10	0.39	230	275	70.0	71.44	69.63	80	80.36	69.56
1/3	3405	56C	2Y/Y	H	0.32	0.54	10	0.51	230	275	71.0	73.56	71.40	81	78.15	66.47
1/2	3425	56C	2Y/Y	J	0.41	0.77	10	0.77	230	275	74.0	77.04	74.90	82	80.11	69.10
3/4	3410	56C	2Y/Y	H	0.59	1.12	12.5	1.16	200	275	75.5	78.11	76.88	83	81.78	71.31
1	3440	56HC	2Y/Y	J	0.63	1.45	15	1.53	185	250	77.0	81.10	79.73	84	84.96	75.53
1.5	3440	56HC	2Y/Y	H	0.87	1.99	20	2.29	175	250	84.0	82.91	82.15	84	86.20	77.77
2	3430	56HC	2Y/Y	G	0.91	2.55	25	3.07	170	240	85.5	84.61	83.99	86	89.24	82.72
1/4	1740	56C	2Y/Y	K	0.34	0.46	10	0.76	300	300	74.0	74.71	72.01	69	64.92	51.73
1/3	1735	56C	2Y/Y	J	0.46	0.58	10	1.00	300	300	76.0	76.54	72.98	70	65.19	51.84
1/2	1730	56C	2Y/Y	J	0.56	0.82	10	1.52	250	300	77.0	77.77	75.94	74	69.60	56.48
3/4	1725	56C	2Y/Y	H	0.83	1.22	12.5	2.29	275	300	78.0	79.36	78.01	74	71.14	58.37
1	1725	56HC	2Y/Y	G	1.06	1.52	15	3.05	250	280	82.5	82.88	81.73	75	71.94	59.16
1.5	1720	56HC	2Y/Y	G	1.34	2.12	20	4.59	250	280	84.0	84.58	83.88	79	75.50	63.49
2	1720	56HC	2Y/Y	G	1.64	2.78	25	6.11	235	270	84.0	85.64	85.00	80	76.83	65.21
1/4	1140	56C	2Y/Y	H	0.52	0.56	10	1.15	175	265	68.0	69.65	66.05	62	54.66	42.50
1/3	1140	56C	2Y/Y	H	0.61	0.70	10	1.52	175	265	70.0	72.74	69.69	64	56.17	43.79
1/2	1135	56C	2Y/Y	G	0.80	0.96	10	2.32	175	265	74.0	75.86	73.48	66	59.02	46.30
3/4	1135	56HC	2Y/Y	G	1.11	1.36	12.5	3.47	175	265	77.0	79.67	77.59	67	60.05	47.21
1	1135	56HC	2Y/Y	F	1.50	1.72	15	4.63	170	265	80.0	80.69	78.82	68	60.14	47.10
1.5	1130	56HC	2Y/Y	F	2.11	2.58	20	6.98	170	265	80.0	81.88	80.48	68	62.16	48.97
2	1130	56HC	2Y/Y	G	2.88	3.39	25	9.31	170	265	80.0	83.03	81.88	69	64.00	51.30
3/4	3410	143TC	2Y/Y	H	0.59	1.12	12.5	1.16	200	275	75.5	78.11	76.88	83	81.78	71.31

Performance Data

TEFC

功率 HP	满载 转速 Full load r/min	机座 Frame	连接 Conn.	代码 Code	460V 电流 Current at 460V			转矩 Torque			效率 Efficiency			功率因数 Power Factor		
					空载 Idle	满载 Full load (A)	堵转 Locked Rotor (A)	满载 Full load (LB-FT)	堵转 Locked Rotor %	最大 Break down %	满载 Full load %	3/4 负 载 3/4 load %	1/2 负 载 1/2 load %	满载 Full load %	3/4 负 载 3/4 load %	1/2 负 载 1/2 load %
1	3440	143TC	2Y/Y	J	0.63	1.45	15	1.53	185	250	77.0	81.10	79.73	84	84.96	75.53
1.5	3440	143TC	2Y/Y	H	0.87	1.99	20	2.29	175	250	84.0	85.05	84.71	84	86.20	77.77
2	3430	145TC	2Y/Y	G	0.91	2.55	25	3.07	170	240	85.5	86.15	86.12	86	89.24	82.72
3	3455	145TC	2Y/Y	H	1.31	3.78	32	4.57	160	230	86.5	86.90	85.91	86	89.66	83.30
3/4	1725	143TC	2Y/Y	H	0.83	1.22	12.5	2.29	275	300	78.0	79.36	71.14	74	78.01	58.37
1	1725	143TC	2Y/Y	G	1.06	1.46	15	3.05	275	300	85.5	84.76	83.20	75	71.94	59.16
1.5	1720	145TC	2Y/Y	G	1.34	2.06	20	4.59	250	280	86.5	86.35	85.13	79	75.50	63.49
2	1720	145TC	2Y/Y	G	1.64	2.71	25	6.11	235	270	86.5	86.82	86.25	80	76.83	65.21
3	1725	145TC	2Y/Y	G	2.57	3.92	32	9.14	215	250	89.5	88.91	88.15	80	77.10	65.61
3/4	1135	143TC	2Y/Y	G	1.11	1.36	12.5	3.47	175	265	77.0	79.67	77.59	67	60.05	47.21
1	1135	145TC	2Y/Y	F	1.50	1.67	15	4.63	170	265	82.5	82.54	81.31	68	60.14	47.10
3	3510	182TC	2Y/Y	J	1.46	3.73	32	4.49	160	230	86.5	87.25	86.36	87	88.65	81.80
5	3500	184TC	2Y/Y	H	2.26	6.01	46	7.51	150	215	88.5	88.91	88.63	88	89.55	83.35
3	1765	182TC	2Y/Y	J	2.53	3.92	32	8.94	215	250	89.5	89.42	88.18	80	75.25	63.24
5	1760	184TC	2Y/Y	H	3.52	6.54	46	14.94	185	225	89.5	89.32	88.61	80	79.82	69.39
1.5	1175	182TC	2Y/Y	G	1.69	2.29	20	6.71	165	250	87.5	87.32	88.43	70	67.30	54.35
2	1170	184TC	2Y/Y	G	2.09	2.90	25	8.99	160	240	88.5	88.32	86.51	73	69.16	56.42
3	1170	184TC	2Y/Y	F	2.88	4.3	32	13.48	155	230	89.5	89.12	87.61	73	65.35	52.23
7.5	3520	213TC	2Δ/Δ	G	1.72	8.82	63.5	11.20	140	200	89.7	89.82	89.45	89	89.95	84.62
10	3520	215TC	2Δ/Δ	G	1.88	11.53	81	14.94	135	200	90.2	90.76	90.25	90	91.66	87.78
7.5	1760	213TC	2Δ/Δ	G	3.65	9.12	63.5	22.41	175	215	91.7	91.63	91.12	84	81.90	73.06
10	1760	215TC	2Δ/Δ	G	4.10	12.16	81	29.87	165	200	91.7	91.85	91.41	84	83.64	75.83
3	1175	213TC	2Y/Y	G	3.18	4.30	32	13.42	155	230	89.5	89.65	88.42	73.0	68.46	55.95
5	1170	215TC	2Y/Y	F	4.82	6.97	46	22.47	150	215	89.5	90.08	89.46	75.0	71.38	59.35
15	3560	254TC	2Δ/Δ	G	4.35	17.34	116	22.15	180	240	91.0	91.17	90.0	89	89.0	83.5
20	3560	256TC	2Δ/Δ	G	5.17	22.87	145	29.54	160	220	91.0	91.25	91.21	90	90.8	87.0
15	1765	254TC	2Δ/Δ	F	7.75	18.31	116	44.68	185	220	92.4	92.42	91.61	83	81.4	71.4
20	1765	256TC	2Δ/Δ	G	9.20	23.97	145	59.58	180	220	93.0	92.45	92.28	84	85.0	77.6
7.5	1170	254TC	2Δ/Δ	G	5.20	10.29	63.5	33.70	180	220	91.0	91.17	90.48	75	69.5	57.5
10	1170	256TC	2Δ/Δ	G	6.83	13.54	81	44.94	170	220	91.0	91.4	90.61	76	70.9	58.7
25	3560	284TSC	2Δ/Δ	F	6.60	28.68	182.5	36.92	170	220	91.7	92.05	91.76	89	89.9	85.1
30	3560	286TSC	2Δ/Δ	E	7.70	34.42	217.5	44.31	170	230	91.7	92.10	92.07	89	90.2	85.7
25	1770	284TC	2Δ/Δ	G	10.50	29.08	182.5	74.26	170	220	93.6	93.42	92.66	86	83.4	74.7
30	1770	286TC	2Δ/Δ	G	12.00	34.90	217.5	89.11	170	220	93.6	93.29	93.12	86	84.5	76.5
15	1175	284TC	2Δ/Δ	G	7.80	19.15	116	67.12	165	220	91.7	91.55	91.15	80	78.7	68.3
20	1175	286TC	2Δ/Δ	F	9.37	25.53	145	89.49	150	210	91.7	91.85	91.18	80	81.9	73.9

* For current at 230V, multiple above values by 2. (230V 的电流值用以上电流数据乘以 2)

Performance Data



TENV

功率 HP	满载 转速 Full load r/min	机座 Frame	连接 Conn.	代码 Code	460V 电流 Current at 460V			转矩 Torque			效率 Efficiency			功率因数 Power Factor		
					空载 Idle	满载 Full load (A)	堵转 Locked Rotor (A)	满载 Full load (LB-FT)	堵转 Locked Rotor %	最大 Break down %	满载 Full load %	3/4 负 载 3/4 load %	1/2 负 载 1/2 load %	满载 Full load %	3/4 负 载 3/4 load %	1/2 负 载 1/2 load %
1/4	3405	56C	2Y/Y	H	0.22	0.42	10	0.39	230	275	70.0	71.44	69.63	80	80.36	69.56
1/3	3405	56C	2Y/Y	H	0.32	0.54	10	0.51	230	275	71.0	73.56	71.40	81	78.15	66.47
1/2	3425	56C	2Y/Y	J	0.41	0.77	10	0.77	230	275	74.0	77.04	74.90	82	80.11	69.10
3/4	3410	56C	2Y/Y	H	0.59	1.12	12.5	1.16	200	275	75.5	78.11	76.88	83	81.78	71.31
1	3440	56HC	2Y/Y	J	0.63	1.45	15	1.53	185	250	77.0	81.10	79.73	84	84.96	75.53
1/4	1740	56C	2Y/Y	K	0.34	0.46	10	0.76	300	300	74.0	74.71	72.01	69	64.92	51.73
1/3	1735	56C	2Y/Y	J	0.46	0.58	10	1.00	300	300	76.0	76.54	72.98	70	65.19	51.84
1/2	1730	56C	2Y/Y	J	0.56	0.82	10	1.52	250	300	77.0	77.77	75.94	74	69.60	56.48
3/4	1725	56C	2Y/Y	H	0.83	1.22	12.5	2.29	275	300	78.0	79.36	78.01	74	71.14	58.37
1	1725	56HC	2Y/Y	G	1.06	1.52	15	3.05	250	280	82.5	82.88	81.73	75	71.94	59.16
1.5	1720	56HC	2Y/Y	G	1.34	2.12	20	4.59	250	280	84.0	84.58	83.88	79	75.50	63.49
2	1720	56HC	2Y/Y	G	1.64	2.78	25	6.11	235	270	84.0	85.64	85.00	80	76.83	65.21
1/4	1140	56C	2Y/Y	H	0.52	0.56	10	1.15	175	265	68.0	69.65	66.05	62	54.66	42.50
1/3	1140	56C	2Y/Y	H	0.61	0.70	10	1.52	175	265	70.0	72.74	69.69	64	56.17	43.79
1/2	1135	56C	2Y/Y	G	0.80	0.96	10	2.32	175	265	74.0	75.86	73.48	66	59.02	46.30
3/4	1135	56HC	2Y/Y	G	1.11	1.36	12.5	3.47	175	265	77.0	79.67	77.59	67	60.05	47.21
1	1135	56HC	2Y/Y	F	1.50	1.72	15	4.63	170	265	80.0	80.69	78.82	68	60.14	47.10
3/4	3410	143TC	2Y/Y	H	0.59	1.12	12.5	1.16	200	275	75.5	78.11	76.88	83	81.78	71.31
1	3440	143TC	2Y/Y	J	0.63	1.45	15	1.53	185	250	77.0	81.10	79.73	84	84.96	75.53
3/4	1725	143TC	2Y/Y	H	0.83	1.22	12.5	2.29	275	300	78.0	79.36	71.14	74	78.01	58.37
1	1725	143TC	2Y/Y	G	1.06	1.46	15	3.05	275	300	85.5	84.76	83.20	75	71.94	59.16
1.5	1720	145TC	2Y/Y	G	1.34	2.06	20	4.59	250	280	86.5	86.35	85.13	79	75.50	63.49
2	1720	145TC	2Y/Y	G	1.64	2.71	25	6.11	235	270	86.5	86.82	86.25	80	76.83	65.21
3/4	1135	143TC	2Y/Y	G	1.11	1.36	12.5	3.47	175	265	77.0	79.67	77.59	67	60.05	47.21
1	1135	145TC	2Y/Y	F	1.50	1.67	15	4.63	170	265	82.5	82.54	81.31	68	60.14	47.10



DIMENSION

inch



NS56C (TENV Footless)

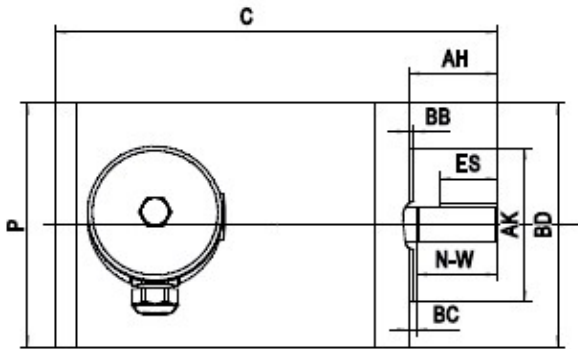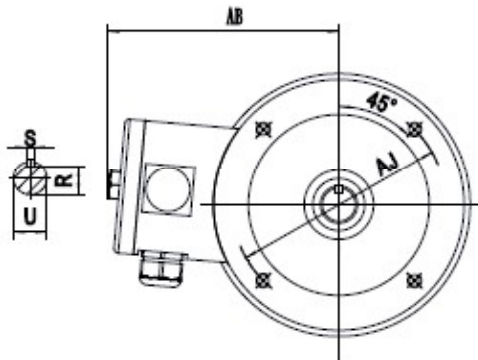



NS56-140 (TENV)

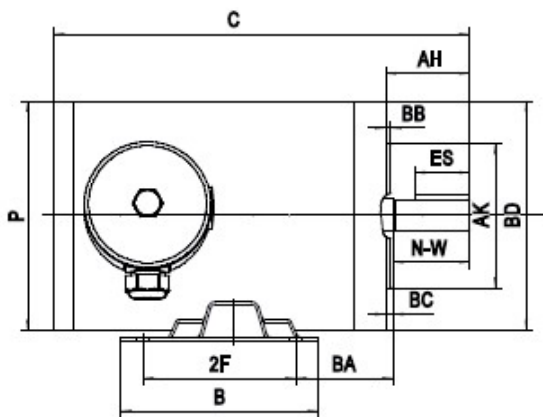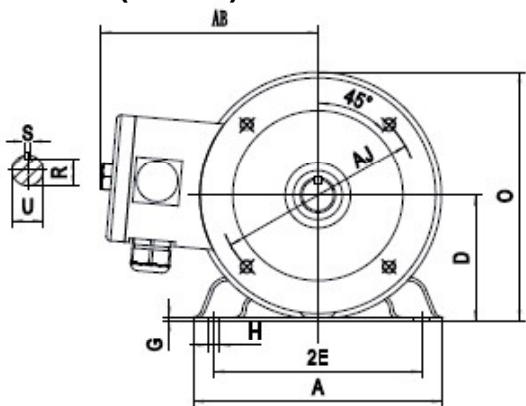

NS56-140 (TEFC)

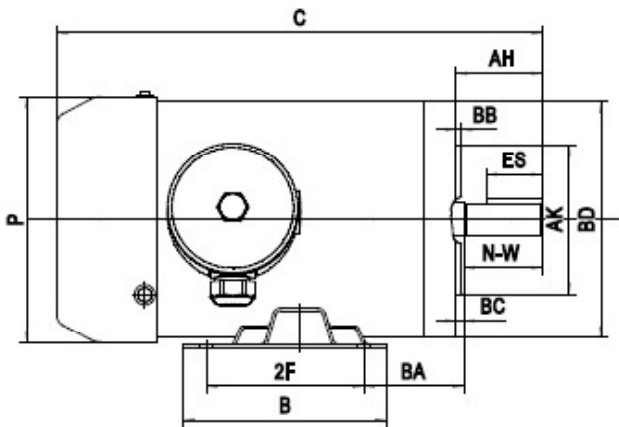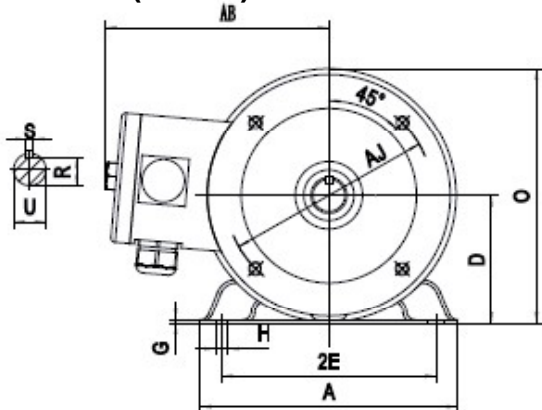

NS180-280 (TEFC)

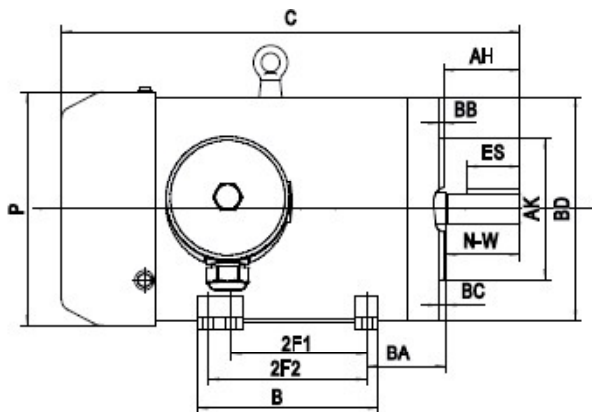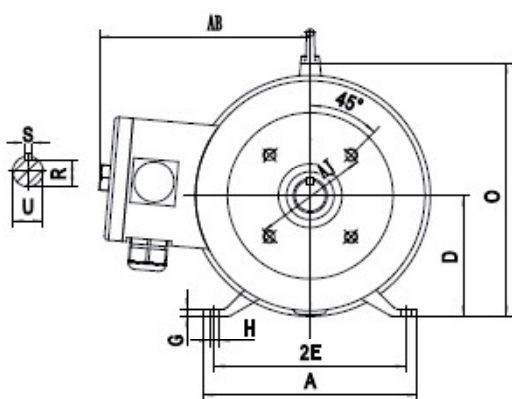

机座 Frame	安装尺寸 MOUNTING			A	B	C		D	G	H	O	P	R	S	AB	轴 伸 SHAFT EXTENSION			轴 承 BEARINGS	
	2E	2F	BA			TEFC	TENV									N-W	U	V	DE	NDE
56C	4.88	3	2.75	6.5	5.0	12.5	10.5	3.5	0.118	0.34	6.8	7.0	0.517	0.188	5.9	1.88	0.625	2	6205	6205
56HC	4.88	5	2.75	6.5	6.5	14.5	12.0	3.5	0.118	0.34	6.8	7.0	0.517	0.188	5.9	1.88	0.625	2	6205	6205
56HC4						16.0	14.0													
143TC	5.5	4	2.75	6.5	5.0	13.4	11.4	3.5	0.118	0.34	6.8	7.0	0.771	0.188	5.9	2.25	0.875	2	6205	6205
145TC	5.5	5	2.75	6.5	6.5	14.2	12.2	3.5	0.118	0.34	6.8	7.0	0.771	0.188	5.9	2.25	0.875	2	6205	6205
145TC2-2						16.2	14.2													
145TC3-4																				
182TC-2	7.5	4.5	3.5	8.6	6.7	17.3	-	4.5	0.394	0.41	9.2	8.9	0.986	0.25	6.9	2.75	1.125	2.5	6306	6306
184TC-2 184TC2-6	7.5	5.5	3.5	8.6	6.7	17.9	-	4.5	0.394	0.41	9.2	8.9	0.986	0.25	6.9	2.75	1.125	2.5	6306	6306
182TC-4/6	7.5	4.5	3.5	8.6	6.7	16.5	-	4.5	0.394	0.41	9.3	8.9	0.986	0.25	6.9	2.75	1.125	2.5	6306	6306
184TC-4/6	7.5	5.5	3.5	8.6	6.7	17.1	-	4.5	0.394	0.41	9.3	8.9	0.986	0.25	6.9	2.75	1.125	2.5	6306	6306
213TC	8.5	5.5	4.25	9.6	8.2	20.5	-	5.25	0.394	0.41	11.0	10.2	1.201	0.312	7.7	3.38	1.375	3.12	6208	6208
215TC	8.5	7	4.25	9.6	8.2	22	-	5.25	0.394	0.41	11.0	10.2	1.201	0.312	7.7	3.38	1.375	3.12	6208	6208
254TC	10	8.25	4.75	11.2	9.45	23.8	-	6.25	0.394	0.53	13.2	12.3	1.416	0.375	9.5	4	1.625	3.75	6309	6309
256TC	10	10	4.75	11.2	12.2	25.4	-	6.25	0.394	0.53	13.2	12.3	1.416	0.375	9.5	4	1.625	3.75	6309	6309
284TSC	11	9.5	4.75	12.2	11.00	25.4	-	7	0.472	0.53	14.7	13.8	1.416	0.375	10.0	3.25	1.625	3	6310	6310
284TC	11	9.5	4.75	12.2	11.00	26.8	-	7	0.472	0.53	14.7	13.8	1.591	0.5	10.0	4.62	1.875	4.38	6310	6310
286TSC	11	11	4.75	12.2	12.50	26.4	-	7	0.472	0.53	14.7	13.8	1.416	0.375	10.0	3.25	1.625	3	6310	6310
286TC	11	11	4.75	12.2	12.50	27.8	-	7	0.472	0.53	14.7	13.8	1.591	0.5	10.0	4.62	1.875	4.38	6310	6310

机 座 FRAME	AJ	AK	BA	MIN BB	BC	MAX BD	孔 数 NUMBER OF HOLE	螺 孔 SCREW	孔 深 DEPTH OF HOLE	U	AH	键密封 Key seal		
												R	ES	S
56C. 56HC	5.875	4.5	2.75	0.16	-0.19	6.5	4	3/8-16	-	0.625	2.06	0.517	1.41	0.188
143TC. 145TC	5.875	4.5	2.75	0.16	+0.12	6.5	4	3/8-16	0.56	0.875	2.12	0.771	1.41	0.188
182TC.184TC	7.25	8.5	3.5	0.25	+0.12	9.0	4	1/2-13	0.75	1.125	2.62	0.986	1.78	0.250
213TC.215TC	7.25	8.5	4.25	0.25	+0.25	9.0	4	1/2-13	0.75	1.375	3.12	1.201	2.41	0.312
254TC.256TC	7.25	8.5	4.75	0.25	+0.25	10.0	4	1/2-13	0.75	1.625	3.75	1.416	2.91	0.375
284TSC.286TSC	9	10.5	4.75	0.25	+0.25	11.25	4	1/2-13	0.75	1.625	3.0	1.416	1.91	0.375
284TC.286TC	9	10.5	4.75	0.25	+0.25	11.25	4	1/2-13	0.75	1.875	4.38	1.591	3.28	0.5

Note: Data above may be changed without prior notice. (以上数据, 如有变动, 恕不另行通知)